


# Wall-mounted air conditioner

Ukura U26X <sup>[R15]</sup>

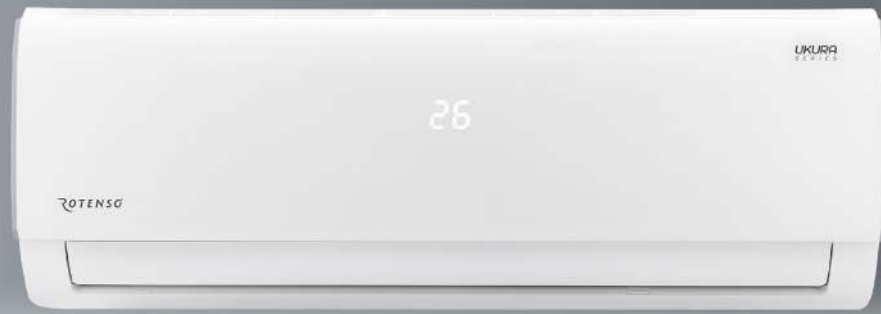

- SCOP 4,1
- Wi-Fi
- 20°C
- iAIR
- 4D
- PZH CERTIFICATE
- 5 year WARRANTY

**1:1**  
SINGLE

**1:X**  
MULTI

## Unit features

- |  |  |                                      |                                    |  |                                  |  |                             |
|--|--|--------------------------------------|------------------------------------|--|----------------------------------|--|-----------------------------|
| <br>Digital DC Inverter SKY <sup>®</sup>       | <br>Automatic purification iAIR <sup>(1)</sup> | <br>Super Ionizer iAIR               | <br>Cold Nano iAIR filter          | <br>Antibacterial HEPA iAIR filter             | <br>Electrostatic HD iAIR filter | <br>Super Silent eMOTO mode <sup>(1)</sup> | <br>Automatic 4D louvres    |
| <br>Turbo eMOTO mode <sup>(1)</sup>            | <br>Air supply eMOTO control system            | <br>Wide-angle eMOTO air supply      | <br>SMART wi-fi                    | <br>Wired controller SMART port <sup>(2)</sup> | <br>SMART panel display ON/OFF   | <br>SMART Follow mode                      | <br>Wireless remote control |
| <br>Wired controller <sup>(2)</sup>            | <br>SMART heating to 8°C <sup>(1)</sup>        | <br>Louvre setting memory            | <br>1W standby mode <sup>(1)</sup> | <br>Auto restart memory                        | <br>Anti-corrosive gold fins     | <br>Silence mode                           | <br>Timer                   |
| <br>Heating at low outdoor temp. down to -20°C | <br>Cooling at low outdoor temp. down to -15°C | <br>Double-sided condensate drainage | <br>Self-diagnostics               | <br>Sleep mode                                 |                                  |  |                             |

1


# Technical specification

Model				Ukura 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (909-3400)
Rated input		Nom. (Min. - Max.)	W	800 (100-1240)
Operating current		Nom. (Min. - Max.)	A	3,5 (0,4-5,4)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (821-3370)
Rated input		Nom. (Min. - Max.)	W	930 (120-1200)
Operating current		Nom. (Min. - Max.)	A	4,0 (0,5-5,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	7,0
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	130
Design load in heating mode (T <sub>biv</sub> -7°C)			kW	2,3
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	788
Dehumidification			l/h	1
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U26Xi R15
EAN product code				5905567606304
Fan speed	H / M / L / S		rpm	1100 / 900 / 750 / 590
Air flow	H / M / L / S		m³/h	435 / 389 / 333 / 259
Sound pressure level	H / M / L / S		dB(A)	37 / 32 / 25 / 21,5
Sound power level			dB(A)	53
Rated input			W	35
Operating current			A	0,2
Net dimensions		W × D × H	mm	715 × 194 × 285
Gross dimensions		W × D × H	mm	780 × 270 × 365
Net weight / Gross weight			kg	6,7 / 8,8
Condensate drain			mm	16
Outdoor unit				U26Xo R15
EAN product code				5905567606311
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m³/h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	62
Net dimensions		W × D × H	mm	720 × 270 × 495
Gross dimensions		W × D × H	mm	835 × 300 × 540
Bracket spacing		W × D	(mm)	452 × 255
Net weight / Gross weight			kg	21 / 22,8
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,47
		TCO <sub>2</sub> eq		0,32
Charged (> 5m)		g/mb		12
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -20-30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				•
1:X MULTI N-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;

# Wall-mounted air conditioner

Ukura H U26Xi<sup>[R15]</sup> / UH26Xo<sup>[R15]</sup>

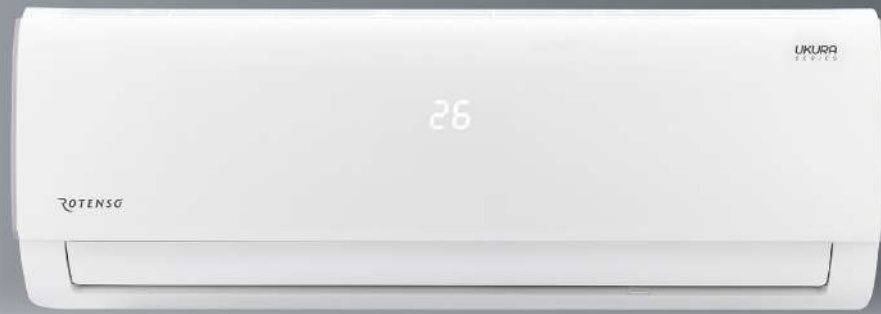

- SCOP 4,1
- Wi-Fi
- 20°C
- iAIR
- Coil
- Coil
- 5 year WARRANTY
- PZH CERTIFICATE

**1:1**  
SINGLE

## Unit features

 Digital DC Inverter SKY <sup>®</sup>	 Automatic purification iAIR <sup>(1)</sup>	 Super Ionizer iAIR	 Cold Nano iAIR filter	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode <sup>(1)</sup>	 Automatic 4D louvres
 Turbo eMOTO mode <sup>(1)</sup>	 Air supply eMOTO control system	 Wide-angle eMOTO air supply	 SMART wi-fi	 Wired controller SMART port <sup>(2)</sup>	 SMART panel display ON/OFF	 SMART Follow mode	 Wireless remote control
 Wired controller <sup>(2)</sup>	 SMART heating to 8°C <sup>(1)</sup>	 Louvre setting memory	 1W standby mode <sup>(1)</sup>	 Auto restart memory	 Anti-corrosive gold fins	 Drip tray heater	 Compressor crankcase heater
 Silence mode	 Timer	 Heating at low outdoor temp. down to -20°C	 Cooling at low outdoor temp. down to -15°C	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode	

1

# Technical specification

Model				Ukura H 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (909-3400)
Rated input		Nom. (Min. - Max.)	W	800 (100-1240)
Operating current		Nom. (Min. - Max.)	A	3,5 (0,4-5,4)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (821-3370)
Rated input		Nom. (Min. - Max.)	W	930 (120-1200)
Operating current		Nom. (Min. - Max.)	A	4,0 (0,5-5,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	7,0
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	130
Design load in heating mode (T <sub>biv</sub> -7°C)			kW	2,3
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	788
Dehumidification			l/h	1
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U26Xi R15
EAN product code				5905567606304
Fan speed	H / M / L / S		rpm	1100 / 900 / 750 / 590
Air flow	H / M / L / S		m <sup>3</sup> /h	435 / 389 / 333 / 259
Sound pressure level	H / M / L / S		dB(A)	37 / 32 / 25 / 21,5
Sound power level			dB(A)	53
Rated input			W	35
Operating current			A	0,2
Net dimensions		W × D × H	mm	715 × 194 × 285
Gross dimensions		W × D × H	mm	780 × 270 × 365
Net weight / Gross weight			kg	6,7 / 8,8
Condensate drain			mm	16
Outdoor unit				UH26Xo R15
EAN product code				5905567606328
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m <sup>3</sup> /h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	62
Net dimensions		W × D × H	mm	720 × 270 × 495
Gross dimensions		W × D × H	mm	835 × 300 × 540
Bracket spacing		W × D	(mm)	452 × 255
Net weight / Gross weight			kg	21 / 22,8
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,47
	Charged (> 5m)	TCO <sub>2</sub> eq		0,32
Pipe connections	Liquid/Gas	mm		Φ6,35 / Φ9,52
		(inches)		(1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm <sup>2</sup>	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm <sup>2</sup>	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm <sup>2</sup>	4 × 1,5
Indoor operating range (cooling / heating)			°C	17-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -20-30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				
1:X MULTI N-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;