


Wall-mounted air conditioner

Ukura U21Xi ^[R16]

S-LINE

HP-LINE

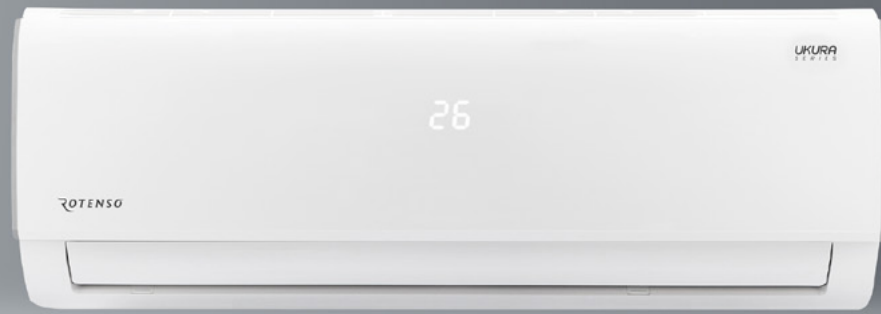

Unit features



Digital DC Inverter SKY[®]



Super Ionizer iAIR



Cold Nano iAIR filter



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Automatic 4D louvres



Air supply eMOTO control system



Wide-angle eMOTO air supply



SMART Wi-Fi



Wired controller SMART port ⁽¹⁾



SMART panel display ON/OFF



SMART Follow mode



Wireless remote control



Wired controller ⁽¹⁾



Louvre setting memory



Auto restart memory



Anti-corrosive gold fins



Silence mode



Timer



Heating at low outdoor temp. down to -20°C



Cooling at low outdoor temp. down to -15°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode

Technical specification

Model				Ukura 2,1 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2051
Rated input		Nom. (Min. - Max.)	W	-
Operating current		Nom. (Min. - Max.)	A	-
Capacity	Heating	Nom. (Min. - Max.)	W	2345
Rated input		Nom. (Min. - Max.)	W	-
Operating current		Nom. (Min. - Max.)	A	-
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	-
SEER			W/W	-
Energy efficiency class, cooling				-
Annual electric energy consumption, cooling			kWh/a	-
Design load in heating mode (Tbiv -7°C)			kW	-
SCOP			W/W	-
Energy efficiency class, heating				-
Annual electric energy consumption, heating			kWh/a	-
Dehumidification			l/h	-
Maximum energy consumption			W	-
Maximum operating current			A	-
Indoor unit				U21Xi R16
EAN product code				5905567613807
Fan speed	H / M / L / S		rpm	1100 / 900 / 750 / 590
Air flow	H / M / L / S		m³/h	435 / 389 / 333 / 259
Sound pressure level	H / M / L / S		dB(A)	37 / 32 / 25 / 21,5
Sound power level			dB(A)	53
Rated input			W	30
Operating current			A	0,2
Net dimensions	W × D × H		mm	715 × 194 × 285
Gross dimensions	W × D × H		mm	780 × 270 × 365
Net weight / Gross weight			kg	6,7 / 8,8
Condensate drain			mm	16
Outdoor unit				-
EAN product code				-
Fan speed	H / M / L		rpm	-
Maximum air flow			m³/h	-
Sound pressure level			dB(A)	-
Sound power level			dB(A)	-
Net dimensions	W × D × H		mm	-
Gross dimensions	W × D × H		mm	-
Bracket spacing	W × D		(mm)	-
Net weight / Gross weight			kg	-
Refrigerant	Type			-
	GWP			-
	≤ 5m	kg		-
	Charged (> 5m)	TCO ₂ eq		-
Pipe connections	Liquid/Gas	mm (inches)		Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length		m		-
Maximum height difference		m		-
Compressor type				-
Type of outdoor unit power supply		V-Hz, Ø		220-240-50, 1f
Electrical protection		A		-
Power cables: outdoor unit		pcs × mm²		Look data at HIRO
Control and power cables: indoor unit - outdoor unit		pcs × mm²		-
Control and power cables: hiro unit - indoor unit		pcs × mm²		4 × 1,5
Indoor operating range (cooling / heating)		°C		17~32 / 0~30
Outdoor operating range (cooling / heating)		°C		- / -
Compatible systems				
1:1 SINGLE				
1:2 DUAL				
1:X MULTI S-Line				●
1:X MULTI N-Line				
1:X MULTI HP-Line				●

T - Turbo; H - High; M - Medium; L - Low; S - Silent;