


# Wall-mounted air conditioner

Versu Cloth Stone VCS26X <sup>[R15]</sup>

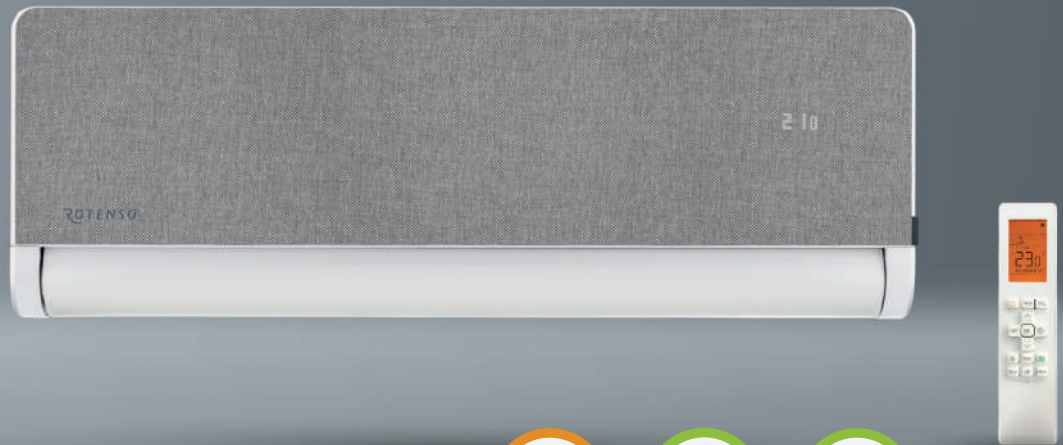

- SCOP 4,6
- Wi-Fi
- 22°C
- Super Ionizer
- HEPA filter
- iAIR filter
- 5 year WARRANTY
- PZH CERTIFICATE

- DEDICATED TO HEATING
- 1:1 SINGLE
- 1:X MULTI

## Unit features

SKY inverter Digital DC Inverter SKY <sup>®</sup>	Textile changeable front panel	Automatic purification iClean <sup>(1)</sup>	Super Ionizer iAIR	3-in-1 (Si,Ion + Photocat. + Nano) iAIR filter <sup>(1)</sup>	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode <sup>(1)</sup>
Automatic 4D louvres	Rotating louvre 180°	Turbo eMOTO mode <sup>(1)</sup>	Upwards cascade air supply	Downwards cascade air supply	Air supply eMOTO control system	Eco eMOTO mode <sup>(1)</sup>	Wide-angle eMOTO air supply
Humidity sensor <sup>(1)(2)</sup>	SMART wi-fi	Wired controller SMART port <sup>(2)</sup>	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control	Wired controller <sup>(2)</sup>	SMART heating to 8°C <sup>(1)</sup>
Louvre setting memory	1W standby mode <sup>(1)</sup>	Auto restart memory	Anti-corrosive gold fins	Drip tray heater	Compressor crankcase heater	Silence mode	Timer
Cooling at low outdoor temp. down to -15°C	Heating at low outdoor temp. down to -22°C <sup>(1)</sup>	Double-sided condensate drainage	Self-diagnostics	Sleep mode	BMS Modbus <sup>(2)</sup>	BMS Bacnet <sup>(2)</sup>	

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

\* Silver Ion + Photocatalytic + Cold Nano

# Technical specification

Model				Versu Cloth Stone 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	8,8
Energy efficiency class, cooling				A+++
Annual electric energy consumption, cooling			kWh/a	103
Design load in heating mode (Tbiv -7°C)			kW	2,5
SCOP			W/W	4,6
Energy efficiency class, heating				A++
Annual electric energy consumption, heating			kWh/a	776
Dehumidification			l/h	1,0
Maximum energy consumption			W	2200
Maximum operating current			A	9,6
Indoor unit				VCS26Xi R15
EAN product code				5905567601026
Fan speed	T / H / M / L / ML / S		rpm	1122 / 910 / 823 / 710 / 652 / 600
Air flow	T / H / M / L / ML / S		m³/h	700 / 555 / 445 / 380 / 270 / 230
Sound pressure level	T / H / M / L / ML / S		dB(A)	40 / 32 / 27 / 24 / 21 / 19
Sound power level			dB(A)	53
Rated input			W	13
Operating current			A	0,1
Net dimensions	W × D × H		mm	920 × 211 × 321
Gross dimensions	W × D × H		mm	1005 × 295 × 385
Net weight / Gross weight			kg	11,3 / 14,2
Condensate drain			mm	16
Outdoor unit				VO26Xo R15
EAN product code				5905567606649
Fan speed	H / M / L		rpm	800 / 620 / 450
Maximum air flow			m³/h	2200
Sound pressure level			dB(A)	53
Sound power level			dB(A)	58
Net dimensions	W × D × H		mm	765 × 303 × 555
Gross dimensions	W × D × H		mm	887 × 337 × 610
Bracket spacing	W × D		(mm)	452 × 286
Net weight / Gross weight			kg	26,4 / 28,8
Refrigerant	Type			R32
	GWP			675
	≤ 5m		kg	0,7
			TCO <sub>2</sub> eq	0,47
Charged > 5m		g/mb	12	
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	16-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -22-30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				•
1:X MULTI N-Line				