































# Aquami All in Split heat pump

AQS40X1o<sup>[R14]</sup> / AQS100T190X1i<sup>[R14]</sup>



## Device features

- |   |  |  |  |  |  |   |  |
|---|--|--|--|--|--|---|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                     | <br>Energy efficiency class at 35°C A+++    | <br>Energy efficiency class at 55°C A++ | <br>Maximum COP 5,20              | <br>Operating range down to -25°C | <br>Supply water temperature of 65°C         | <br>Integrated USB port for updates                         |
| <br>Energy meter                             | <br>Smart Grid functionality              | <br>Twin rotary compressor                  | <br>Integrated electric heater          | <br>Outdoor unit drip tray heater | <br>Compressor crankcase heater   | <br>Indoor unit drip tray                    | <br>Easy installation and maintenance                       |
| <br>Compact indoor split unit housing        | <br>Maximum installation length up to 30m | <br>Silent mode                             | <br>Built-in Wi-Fi module               | <br>Daily operation schedule      | <br>Configurable weekly schedules | <br>Vacation mode                            | <br>Menu in English   |
| <br>Multilanguage menu                       | <br>Integrated temperature sensor         | <br>Weather operating modes (climate curve) | <br>2 heating control zones             | <br>Dedicated application         | <br>Disinfection                  | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 60°C (in DHW mode) |
| <br>Integrated DHW tank                      | <br>Tank of stainless steel               | <br>Built-in switching valve                |  |  |  |   |  |

Notes: DHW – Domestic hot water, LWT – Leaving water temperature  
The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

Rotenso reserves the right to make changes to its products without prior notice.

# Specification indoor unit

Model			AQ5100T190X11 R14		
EAN code			5905567602146		
Operation modes			Heating and cooling		
Leaving water temperature	Surface cooling	°C	5-25		
	Surface heating	°C	25-65		
	DHW (tank)	°C	30-60		
Power supply		V-Hz, Ø	220-240-50, 1f		
Rated input / Operating current		W / A	3095 / 13,5		
Sound power level		dB(A)	38		
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f		
	Number of heating stages / Power	pcs. / kW	1 / 3		
	Maximum operating current	A	13,3		
Net dimensions		(W×D×H)	600×600×1683		
Gross dimensions		(W×D×H)	653×653×1900		
Net weight / Gross weight		kg	139/154		
Water circuit	Water connections		inch	R1" external	
	Pressure relief valve		MPa	0,3	
	Condensate drain		mm	Ø25	
	Expansion tank	Total volume / Actual volume		l	8 / 4,8
		Maximum pressure / Initial pressure		MPa	0,3 / 0,1
	PHE / plate heat exchanger	Type		PHE / plate heat exchanger	
		Minimum flow		l/min	6
	Water pump head		m	9	
	Water pump head			DC	
	DHW tank	Tank material		Stainless steel 316L	
		Housing material/colour		Polyurethane foam, steel / white	
		Tank capacity		l	190
		Maximum water temperature (disinfection mode)		°C	70
Insulation thickness		mm	45		
Maximum pressure		bar	10		
Refrigerant circuit		Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	5 × 2,5		
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)		

# Specification outdoor unit

Model			AQ540X1o R14
EAN Code			5905567601071
Power supply			220-240-50, 1f
Heating (A7/W35)	Capacity	kW	4,25
	Rated input	kW	0,82
	COP		5,20
Heating (A7/W45)	Capacity	kW	4,35
	Rated input	kW	1,14
	COP		3,80
Heating (A7/W55)	Capacity	kW	4,40
	Rated input	kW	1,49
	COP		2,95
Cooling (A35/W18)	Capacity	kW	4,50
	Rated input	kW	0,81
	EER		5,55
Cooling (A35/W7)	Capacity	kW	4,70
	Rated input	kW	1,36
	EER		3,45
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		4,85
	Rated heat output	kW	5,5
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	191
	Annual energy consumption	kWh	2351
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A+++
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,31
	Rated heat output	kW	4,4
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	129,5
	Annual energy consumption	kWh	2742
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A++
SEER	LWT at 7°C		4,99
	LWT at 8°C		7,77
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B16
Compressor	Type	Twin rotary inverter compressor DC	
Fan	Type	Brushless DC motor / BLDC	
	Quantity	1	
Refrigerant	Type/ GWP	R32 / 675	
	Charged (<15m)	kg	1,5
Pipe connections	Liquid / Gas	mm	Ø6,35 (1/4") / Ø15,9 (5/8")
	Minimum installation length	m	2
	Maximum installation length	m	30
	Additional amount of refrigerant for over 15 linear meters	g/m	20
Maximum height difference	Outdoor unit above the indoor unit	m	20
	Outdoor unit below the indoor unit	m	20
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	3 × 2,5
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)
Bracket spacing		(W×D)	663×375
Sound pressure level		dB(A)	44
Sound power level			56
Net dimensions		(W×D×H)	1008×426×712
Gross dimensions		(W×D×H)	1065×485×800
Net weight/Gross weight		kg	58/63,5
Operating outdoor temperature	Cooling	°C	-5-43
	Heating	°C	-25-35
	DHW	°C	-25-43


1. Seasonal energy efficiency class measured under average climate conditions

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>n</sub>: 30mA







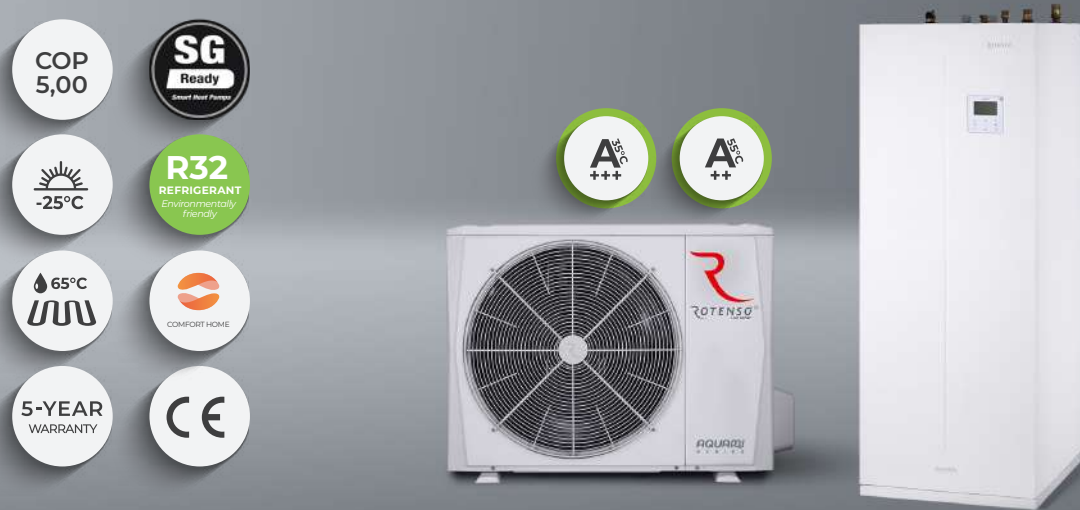



















\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# Aquami All in Split heat pump

AQS60X1o<sup>[R14]</sup> / AQS100T190X1i<sup>[R14]</sup>



## Device features

- |   |  |  |  |  |  |   |  |  |
|---|--|--|--|--|--|---|--|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                     | <br>Energy efficiency class at 35°C A+++    | <br>Energy efficiency class at 55°C A++   | <br>Maximum COP 5,00              | <br>Operating range down to -25°C | <br>Supply water temperature of 65°C         | <br>Integrated USB port for updates                         |  |
| <br>Energy meter                             | <br>Smart Grid functionality              | <br>Twin rotary compressor                  | <br>Integrated electric heater  | <br>Outdoor unit drip tray heater | <br>Compressor crankcase heater   | <br>Indoor unit drip tray                    | <br>Easy installation and maintenance                       |  |
| <br>Compact indoor split unit housing        | <br>Maximum installation length up to 30m | <br>Silent mode                             | <br>Built-in Wi-Fi module   | <br>Daily operation schedule      | <br>Configurable weekly schedules | <br>Vacation mode                            | <br>Menu in English   |  |
| <br>Multilanguage menu                       | <br>Integrated temperature sensor         | <br>Weather operating modes (climate curve) | <br>2 heating control zones   | <br>Dedicated application         | <br>Disinfection                  | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 60°C (in DHW mode) |  |
| <br>Integrated DHW tank                      | <br>Tank of stainless steel               | <br>Built-in switching valve                | <p>Notes: DHW – Domestic hot water, LWT – Leaving water temperature<br/>The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.</p> |  |  |   |  |  |

Rotenso reserves the right to make changes to its products without prior notice.

# Specification indoor unit

Model			AQS100T190X11 R14		
EAN code			5905567602146		
Operation modes			Heating and cooling		
Leaving water temperature	Surface cooling	°C	5-25		
	Surface heating	°C	25-65		
	DHW (tank)	°C	30-60		
Power supply		V-Hz, Ø	220-240-50, 1f		
Rated input / Operating current		W / A	3095 / 13,5		
Sound power level		dB(A)	38		
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f		
	Number of heating stages / Power	pcs. / kW	1 / 3		
	Maximum operating current	A	13,3		
Net dimensions		(W×D×H)	600×600×1683		
Gross dimensions		(W×D×H)	653×653×1900		
Net weight / Gross weight		kg	139/154		
Water circuit	Water connections		inch	R1" external	
	Pressure relief valve		MPa	0,3	
	Condensate drain		mm	Ø25	
	Expansion tank	Total volume / Actual volume		l	8 / 4,8
		Maximum pressure / Initial pressure		MPa	0,3 / 0,1
	PHE / plate heat exchanger	Type		PHE / plate heat exchanger	
		Minimum flow		l/min	6
	Water pump head		m	9	
	Water pump head			DC	
	DHW tank	Tank material		Stainless steel 316L	
		Housing material/colour		Polyurethane foam, steel / white	
		Tank capacity		l	190
		Maximum water temperature (disinfection mode)		°C	70
		Insulation thickness		mm	45
Maximum pressure		bar	10		
Refrigerant circuit		Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>		5 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>		2 × 0,75 (shielded cable)	

# Specification outdoor unit

Model			AQ560X1o R14	
EAN Code			5905567602054	
Power supply			220-240-50, 1f	
Heating (A7/W35)	Capacity	kW	6,20	
	Rated input	kW	1,24	
	COP		5,00	
Heating (A7/W45)	Capacity	kW	6,35	
	Rated input	kW	1,69	
	COP		3,75	
Heating (A7/W55)	Capacity	kW	6,00	
	Rated input	kW	2,00	
	COP		3,00	
Cooling (A35/W18)	Capacity	kW	6,55	
	Rated input	kW	1,34	
	EER		4,90	
Cooling (A35/W7)	Capacity	kW	7,00	
	Rated input	kW	2,33	
	EER		3,00	
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		4,95	
	Rated heat output	kW	6,8	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	195	
	Annual energy consumption	kWh	2845	
Seasonal space heating energy efficiency class <sup>(1)</sup>			A+++	
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,52	
	Rated heat output	kW	5,7	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	137,9	
	Annual energy consumption	kWh	3343	
Seasonal space heating energy efficiency class <sup>(1)</sup>			A++	
SEER	LWT at 7°C		5,34	
	LWT at 8°C		8,21	
Minimum rated current of the overcurrent circuit breaker with breaker type			A	
Compressor			Twin rotary inverter compressor DC	
Fan	Type		Brushless DC motor / BLDC	
	Quantity		1	
Refrigerant	Type/ GWP		R32 / 675	
	Charged (<15m)	kg	1,5	
		TCO <sub>2</sub> eq	1,02	
Pipe connections	Liquid / Gas	mm	Ø6,35 (1/4") / Ø15,9 (5/8")	
	Minimum installation length	m	2	
	Maximum installation length	m	30	
	Additional amount of refrigerant for over 15 linear meters	g/m	20	
Maximum height difference	Outdoor unit above the indoor unit	m	20	
	Outdoor unit below the indoor unit	m	20	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	3 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)	
Bracket spacing		(W×D)	663×375	
Sound pressure level		dB(A)	45	
Sound power level			58	
Net dimensions		(W×D×H)	mm	1008×426×712
Gross dimensions		(W×D×H)	mm	1065×485×800
Net weight/Gross weight		kg	58/63,5	
Operating outdoor temperature	Cooling	°C	-5-43	
	Heating	°C	-25-35	
	DHW	°C	-25-43	


1. Seasonal energy efficiency class measured under average climate conditions

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>n</sub>: 30mA







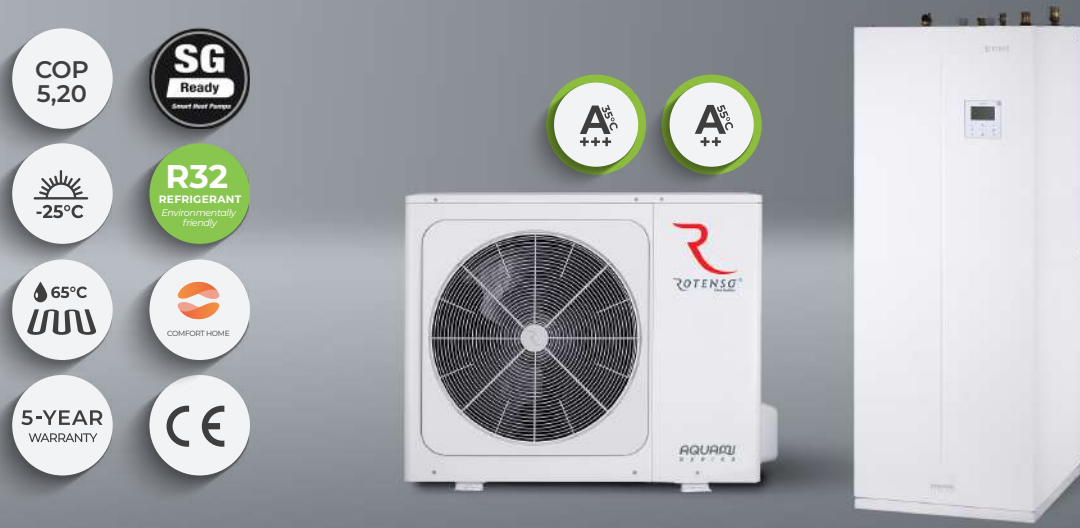
























\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# Aquami All in Split heat pump

AQS80X1o<sup>[R14]</sup> / AQS100T190X1i<sup>[R14]</sup>



## Device features

- |   |  |  |  |  |  |   |  |
|---|--|--|--|--|--|---|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                     | <br>Energy efficiency class at 35°C A+++    | <br>Energy efficiency class at 55°C A++   | <br>Maximum COP 5,20              | <br>Operating range down to -25°C | <br>Supply water temperature of 65°C         | <br>Integrated USB port for updates                         |
| <br>Energy meter                             | <br>Smart Grid functionality              | <br>Twin rotary compressor                  | <br>Integrated electric heater  | <br>Outdoor unit drip tray heater | <br>Compressor crankcase heater   | <br>Indoor unit drip tray                    | <br>Easy installation and maintenance                       |
| <br>Compact indoor split unit housing        | <br>Maximum installation length up to 30m | <br>Silent mode                             | <br>Built-in Wi-Fi module   | <br>Daily operation schedule      | <br>Configurable weekly schedules | <br>Vacation mode                            | <br>Menu in English   |
| <br>Multilanguage menu                       | <br>Integrated temperature sensor         | <br>Weather operating modes (climate curve) | <br>2 heating control zones   | <br>Dedicated application         | <br>Disinfection                  | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 60°C (in DHW mode) |
| <br>Integrated DHW tank                      | <br>Tank of stainless steel               | <br>Built-in switching valve                | <p>Notes: DHW – Domestic hot water, LWT – Leaving water temperature<br/>The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.</p> |  |  |   |  |

Rotenso reserves the right to make changes to its products without prior notice.

# Specification indoor unit

Model			AQS100T190X11 R14		
EAN code			5905567602146		
Operation modes			Heating and cooling		
Leaving water temperature	Surface cooling	°C	5-25		
	Surface heating	°C	25-65		
	DHW (tank)	°C	30-60		
Power supply		V-Hz, Ø	220-240-50, 1f		
Rated input / Operating current		W / A	3095 / 13,5		
Sound power level		dB(A)	38		
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f		
	Number of heating stages / Power	pcs. / kW	1 / 3		
	Maximum operating current	A	13,3		
Net dimensions		(WxDxH)	600x600x1683		
Gross dimensions		(WxDxH)	653x653x1900		
Net weight / Gross weight		kg	139/154		
Water circuit	Water connections		inch	R1" external	
	Pressure relief valve		MPa	0,3	
	Condensate drain		mm	Ø25	
	Expansion tank	Total volume / Actual volume		l	8 / 4,8
		Maximum pressure / Initial pressure		MPa	0,3 / 0,1
	PHE / plate heat exchanger	Type		PHE / plate heat exchanger	
		Minimum flow		l/min	6
	Water pump head		m	9	
	Water pump head			DC	
	DHW tank	Tank material		Stainless steel 316L	
		Housing material/colour		Polyurethane foam, steel / white	
		Tank capacity		l	190
		Maximum water temperature (disinfection mode)		°C	70
Insulation thickness		mm	45		
Maximum pressure		bar	10		
Refrigerant circuit		Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	5 × 2,5		
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)		

# Specification outdoor unit

Model			AQS80X1o R14
EAN Code			5905567602061
Power supply			220-240-50, 1f
Heating (A7/W35)	Capacity	kW	8,30
	Rated input	kW	1,60
	COP		5,20
Heating (A7/W45)	Capacity	kW	8,20
	Rated input	kW	2,08
	COP		3,95
Heating (A7/W55)	Capacity	kW	7,50
	Rated input	kW	2,36
	COP		3,18
Cooling (A35/W18)	Capacity	kW	8,40
	Rated input	kW	1,66
	EER		5,05
Cooling (A35/W7)	Capacity	kW	7,40
	Rated input	kW	2,19
	EER		3,38
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		5,21
	Rated heat output	kW	8,1
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	205,6
	Annual energy consumption	kWh	3218
Seasonal space heating energy efficiency class <sup>(1)</sup>			A+++
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,36
	Rated heat output	kW	6,6
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	131,6
	Annual energy consumption	kWh	4054
Seasonal space heating energy efficiency class <sup>(1)</sup>			A++
SEER	LWT at 7°C		5,83
	LWT at 8°C		8,95
Minimum rated current of the overcurrent circuit breaker with breaker type			A
Compressor			Twin rotary inverter compressor DC
Fan	Type		Brushless DC motor / BLDC
	Quantity		1
Refrigerant	Type/ GWP		R32 / 675
	Charged (<15m)	kg	1,65
		TCO <sub>2</sub> eq	
Pipe connections	Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")
	Minimum installation length	m	2
	Maximum installation length	m	30
	Additional amount of refrigerant for over 15 linear meters	g/m	38
Maximum height difference	Outdoor unit above the indoor unit	m	20
	Outdoor unit below the indoor unit	m	20
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	3 × 4
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)
Bracket spacing		(WxD)	656x456
Sound pressure level		dB(A)	46
Sound power level			59
Net dimensions		(WxDxH)	1118x523x865
Gross dimensions		(WxDxH)	1180x560x890
Net weight/Gross weight		kg	75/89
Operating outdoor temperature	Cooling	°C	-5-43
	Heating	°C	-25-35
	DHW	°C	-25-43

1. Seasonal energy efficiency class measured under average climate conditions

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>n</sub>: 30mA


























\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

# Aquami All in Split heat pump

AQS100X1o<sup>[R14]</sup> / AQS100T190X1i<sup>[R14]</sup>



## Device features

- |   |  |  |  |  |  |   |  |
|---|--|--|--|--|--|---|--|
| <br>Environmentally friendly refrigerant R32 | <br>Efficient heating                     | <br>Energy efficiency class at 35°C A+++    | <br>Energy efficiency class at 55°C A++   | <br>Maximum COP 5,00              | <br>Operating range down to -25°C | <br>Supply water temperature of 65°C         | <br>Integrated USB port for updates                         |
| <br>Energy meter                             | <br>Smart Grid functionality              | <br>Twin rotary compressor                  | <br>Integrated electric heater  | <br>Outdoor unit drip tray heater | <br>Compressor crankcase heater   | <br>Indoor unit drip tray                    | <br>Easy installation and maintenance                       |
| <br>Compact indoor split unit housing        | <br>Maximum installation length up to 30m | <br>Silent mode                             | <br>Built-in Wi-Fi module   | <br>Daily operation schedule      | <br>Configurable weekly schedules | <br>Vacation mode                            | <br>Menu in English   |
| <br>Multilanguage menu                       | <br>Integrated temperature sensor         | <br>Weather operating modes (climate curve) | <br>2 heating control zones   | <br>Dedicated application         | <br>Disinfection                  | <br>DHW circulation pump operation schedules | <br>Maximum leaving water temperature of 60°C (in DHW mode) |
| <br>Integrated DHW tank                      | <br>Tank of stainless steel               | <br>Built-in switching valve                | <p>Notes: DHW – Domestic hot water, LWT – Leaving water temperature<br/>The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.</p> |  |  |   |  |

Rotenso reserves the right to make changes to its products without prior notice.

# Specification indoor unit

Model			AQS100T190X11 R14		
EAN code			5905567602146		
Operation modes			Heating and cooling		
Leaving water temperature	Surface cooling	°C	5-25		
	Surface heating	°C	25-65		
	DHW (tank)	°C	30-60		
Power supply		V-Hz, Ø	220-240-50, 1f		
Rated input / Operating current		W / A	3095 / 13,5		
Sound power level		dB(A)	38		
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f		
	Number of heating stages / Power	pcs. / kW	1 / 3		
	Maximum operating current	A	13,3		
Net dimensions		(W×D×H)	600×600×1683		
Gross dimensions		(W×D×H)	653×653×1900		
Net weight / Gross weight		kg	139/154		
Water circuit	Water connections		inch	R1" external	
	Pressure relief valve		MPa	0,3	
	Condensate drain		mm	Ø25	
	Expansion tank	Total volume / Actual volume		l	8 / 4,8
		Maximum pressure / Initial pressure		MPa	0,3 / 0,1
	PHE / plate heat exchanger	Type		PHE / plate heat exchanger	
		Minimum flow		l/min	6
	Water pump head		m	9	
	Water pump head			DC	
	DHW tank	Tank material		Stainless steel 316L	
		Housing material/colour		Polyurethane foam, steel / white	
		Tank capacity		l	190
		Maximum water temperature (disinfection mode)		°C	70
		Insulation thickness		mm	45
		Maximum pressure		bar	10
Refrigerant circuit		Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>		5 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm <sup>2</sup>		2 × 0,75 (shielded cable)	

# Specification outdoor unit

Model			AQS100X1o R14	
EAN Code			5905567602078	
Power supply			220-240-50, 1f	
Heating (A7/W35)	Capacity	kW	10,00	
	Rated input	kW	2,00	
	COP		5,00	
Heating (A7/W45)	Capacity	kW	10,00	
	Rated input	kW	2,63	
	COP		3,80	
Heating (A7/W55)	Capacity	kW	9,50	
	Rated input	kW	3,06	
	COP		3,10	
Cooling (A35/W18)	Capacity	kW	10,00	
	Rated input	kW	2,08	
	EER		4,80	
Cooling (A35/W7)	Capacity	kW	8,20	
	Rated input	kW	2,48	
	EER		3,30	
Seasonal energy efficiency LWT 35°C	SCOP <sup>(1)</sup>		5,19	
	Rated heat output	kW	9,2	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	204,8	
	Annual energy consumption	kWh	3644	
Seasonal space heating energy efficiency class <sup>(1)</sup>			A+++	
Seasonal energy efficiency LWT 55°C	SCOP <sup>(1)</sup>		3,49	
	Rated heat output	kW	7,7	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	135,7	
	Annual energy consumption	kWh	4567	
Seasonal space heating energy efficiency class <sup>(1)</sup>			A++	
SEER	LWT at 7°C		5,98	
	LWT at 8°C		8,78	
Minimum rated current of the overcurrent circuit breaker with breaker type			A	
Compressor			Twin rotary inverter compressor DC	
Fan	Type		Brushless DC motor / BLDC	
	Quantity		1	
Refrigerant	Type/ GWP		R32 / 675	
	Charged (<15m)	kg	1,65	
		TCO <sub>2</sub> eq		1,11
Pipe connections	Liquid / Gas	mm	Ø9,52 (3/8") / Ø15,9 (5/8")	
	Minimum installation length	m	2	
	Maximum installation length	m	30	
	Additional amount of refrigerant for over 15 linear meters	g/m	38	
Maximum height difference	Outdoor unit above the indoor unit	m	20	
	Outdoor unit below the indoor unit	m	20	
Minimal wire pcs and dimension of cords*			pcs × mm <sup>2</sup>	3 × 4
Control cables: indoor unit to outdoor unit			pcs × mm <sup>2</sup>	2 × 0,75 (shielded cable)
Bracket spacing			(W×D)	656×456
Sound pressure level			dB(A)	49
Sound power level				60
Net dimensions		(W×D×H)	mm	1118×523×865
Gross dimensions		(W×D×H)	mm	1180×560×890
Net weight/Gross weight		kg		75/86
Operating outdoor temperature	Cooling	°C	-5-43	
	Heating	°C	-25-35	
	DHW	°C	-25-43	

1. Seasonal energy efficiency class measured under average climate conditions

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I<sub>n</sub>: 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.