


Ducted air conditioner

Nevo N26Xi ^[R15]

S-LINE

HP-LINE

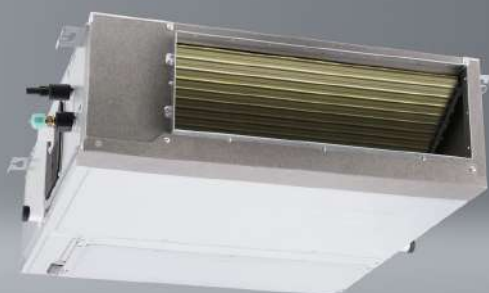

Features device



Digital DC Inverter SKY®



Electrostatic HD iAIR filter



Wide-angle eMOTO air supply



Air supply eMOTO control system



SMART Wi-Fi



Wired controller SMART port



Wireless remote control ⁽¹⁾



Wired controller



SMART Follow mode



Autorestart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -22°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode ⁽¹⁾



Integrated condensate pump



Fresh air supply ⁽¹⁾



ON/OFF remote output



Alarm output



Weekly controller output



Central controller output



Adjustable static pressure



Additional air supply ⁽¹⁾



BMS Modbus ⁽¹⁾



BMS Bacnet ⁽¹⁾



Air inlet in the back / from down



Remote controller IrDA receiver

Technical specification

Model				Nevo 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638
Rated input		Nom. (Min. - Max.)	W	-
Operating current		Nom. (Min. - Max.)	A	-
Capacity	Heating	Nom. (Min. - Max.)	W	2931
Rated input		Nom. (Min. - Max.)	W	-
Operating current		Nom. (Min. - Max.)	A	-
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	-
SEER			W/W	-
Energy efficiency class, cooling				-
Annual electric energy consumption, cooling			kWh/a	-
Design load in heating mode (Tbiv -7°C)			kW	-
SCOP			W/W	-
Energy efficiency class, heating				-
Annual electric energy consumption, heating			kWh/a	-
Dehumidification			l/h	-
Maximum energy consumption			W	-
Maximum operating current			A	-
Indoor unit				N26Xi R15
EAN product code				5905567606137
Fan speed	T / H / M / L	rpm	1130 / 1080 / 1047 / 965	
Air flow	T / H / M / L	m³/h	620 / 575 / 540 / 450	
Sound pressure level	T / H / M / L	dB(A)	34,5 / 33 / 32 / 31	
Sound power level		dB(A)	52	
Rated input		W	80	
Operating current		A	0,3	
ESP - External static pressure	Standard	Pa	25	
	Range	Pa	0 - 80	
Net dimensions	W × D × H	mm	700 × 506 × 200	
Gross dimensions	W × D × H	mm	860 × 540 × 285	
Net weight / Gross weight		kg	16,6 / 19,8	
Condensate drain		mm	25	
Outdoor unit				-
EAN product code				-
Fan speed	H / M / L	rpm	-	
Maximum air flow		m³/h	-	
Sound pressure level		dB(A)	-	
Sound power level		dB(A)	-	
Net dimensions	W × D × H	mm	-	
Gross dimensions	W × D × H	mm	-	
Bracket spacing	W × D	(mm)	-	
Net weight / Gross weight		kg	-	
Refrigerant	Type		-	
	GWP		-	
	≤ 5m	kg	-	
		TCO ₂ eq	-	
	Charged (> 5m)	g/mb	-	
Pipe connections	Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	
Maximum installation length		m	-	
Maximum height difference		m	-	
Compressor type				-
Type of outdoor unit power supply		V-Hz, Ø	220-240~50, 1f	
electrical protection		A	-	
Power cables: outdoor unit		pcs × mm²	Data in HIRO	
Control and power cables: indoor unit - outdoor unit		pcs × mm²	4 × 1	
Indoor operating range (cooling / heating)		°C	16~32 / 0~30	
Outdoor operating range (cooling / heating)		°C	-	
Compatible systems				
1:1 SINGLE				
1:2 DUAL				
1:X MULTI S-Line				●
1:X MULTI N-Line				
1:X MULTI HP-Line				●

T - Turbo; H - High; ML - Middle; L - Low