


Wall-mounted air conditioner

Versu Silver VS26X ^[R14]

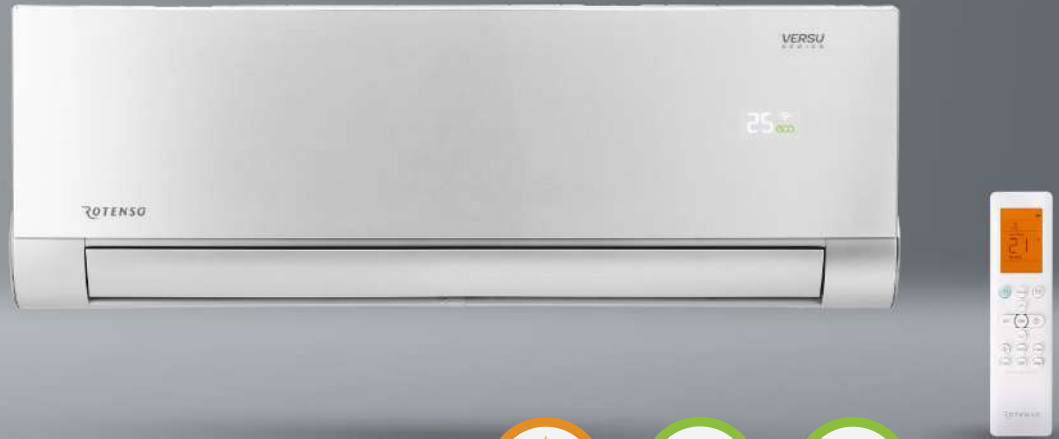

- SCOP 4,6
- Wi-Fi
- 22°C
- Super Ionizer iAIR
- Compressor crankcase heater
- PZH CERTIFICATE
- 5 year WARRANTY

- DEDICATED TO HEATING
- 1:1 SINGLE
- 1:X MULTI

Unit features

 Digital DC Inverter SKY®	 Automatic cleaning iAIR ⁽¹⁾	 Super Ionizer iAIR	 Cold Nano iAIR filter	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode ⁽¹⁾	 Automatic 4D louvres
 Turbo eMOTO mode ⁽¹⁾	 Air supply eMOTO control system	 Eco eMOTO mode ⁽¹⁾	 Wide-angle eMOTO air supply	 SMART wi-fi	 SMART twilight sensor	 Wired controller SMART port ⁽²⁾	 SMART Follow mode
 Wireless remote control	 Wired controller ⁽²⁾	 SMART heating to 8°C ⁽¹⁾	 Louvre setting memory	 1W standby mode ⁽¹⁾	 Auto restart memory	 Anti-corrosive gold fins	 Drip tray heater
 Compressor crankcase heater	 Cooling at low outdoor temp. down to -15°C	 Heating at low outdoor temp. down to -22°C ⁽¹⁾	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode		

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

Technical specification

Model				Versu Silver 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3224)
Rated input		Nom. (Min. - Max.)	W	613 (90-1140)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,4-4,9)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (820-3703)
Rated input		Nom. (Min. - Max.)	W	637 (110-1080)
Operating current		Nom. (Min. - Max.)	A	2,8 (0,5-4,7)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	8,6
Energy efficiency class, cooling				A+++
Annual electric energy consumption, cooling			kWh/a	107
Design load in heating mode (Tbiv -7°C)			kW	2,5
SCOP			W/W	4,6
Energy efficiency class, heating				A++
Annual electric energy consumption, heating			kWh/a	775
Dehumidification			l/h	1
Maximum energy consumption			W	2200
Maximum operating current			A	9,6
Indoor unit				VS26Xi R14
Fan speed	H / M / L / S		rpm	1150 / 950 / 850 / 750
Air flow	H / M / L / S		m³/h	558 / 478 / 384 / 240
Sound pressure level	H / M / L / S		dB(A)	37 / 26 / 22 / 20
Sound power level			dB(A)	51
Rated input			W	26
Operating current			A	0,1
Net dimensions	W × D × H		mm	897 × 182 × 312
Gross dimensions	W × D × H		mm	985 × 260 × 385
Net weight / Gross weight			kg	10,5 / 14,2
Condensate drain			mm	16
Outdoor unit				VO26Xo R14
Fan speed	H / M / L		rpm	800 / 620 / 450
Maximum air flow			m³/h	2150
Sound pressure level			dB(A)	54
Sound power level			dB(A)	60
Net dimensions	W × D × H		mm	765 × 303 × 555
Gross dimensions	W × D × H		mm	887 × 337 × 610
Bracket spacing	W × D		(mm)	452 × 286
Net weight / Gross weight			kg	26,7 / 29,1
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,62
		TCO ₂ eq		0,42
Charged > 5m	g/mb		12	
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1φ
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (Cooling / Heating)			°C	17~32 / 0~30
Outdoor operating range (Cooling / Heating)			°C	-15~50 / -22~30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI				•

H - High; M - Medium; L - Low; S - Silent