


Wall-mounted air conditioner

Mirai M26X^[R15]

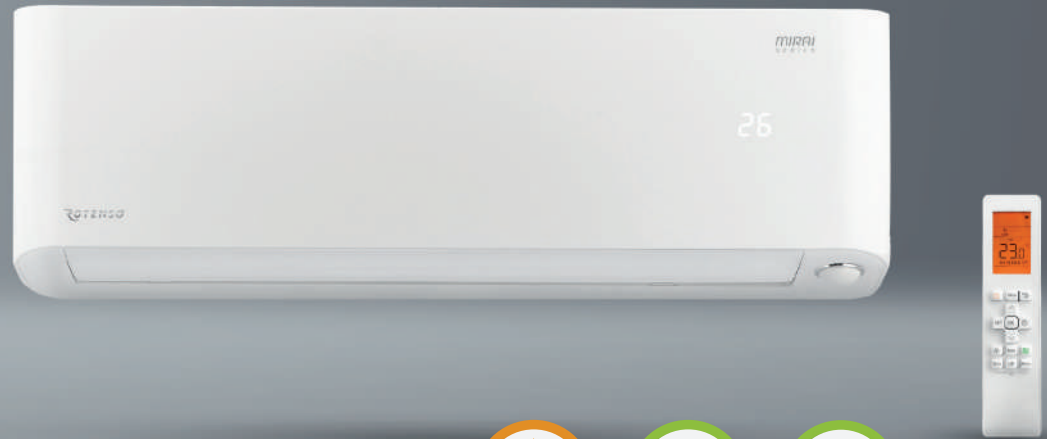

- SCOP 5,3
- Wi-Fi
- 30°C
- iAIR
- Coil
- Coil
- 5 year WARRANTY
- PZH CERTIFICATE

- DEDICATED TO HEATING
- 1:1 SINGLE
- 1:X MULTI

Unit features

 Digital DC Inverter SKY [®]	 Automatic purification iAIR ⁽¹⁾	 Super Ionizer iAIR	 Silver Ion iAIR filter	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode ⁽¹⁾	 Automatic 4D louvres
 Turbo eMOTO mode ⁽¹⁾	 Air supply eMOTO control system	 Eco eMOTO mode ⁽¹⁾	 Wide-angle eMOTO air supply	 SMART wi-fi	 Humidity sensor ⁽¹⁾⁽³⁾	 SMART Eye Away ⁽¹⁾	 SMART Eye Follow ⁽¹⁾
 Twilight Sensor ⁽¹⁾	 Wired controller SMART port ⁽²⁾	 SMART panel display ON/OFF	 SMART Follow mode	 Wireless remote control	 Wired controller ⁽²⁾	 SMART heating to 8°C ⁽¹⁾	 SMART heating to 12°C ⁽¹⁾
 Louvre setting memory	 1W standby mode ⁽¹⁾	 Auto restart memory	 Anti-corrosive gold fins	 Drip tray heater	 Compressor crankcase heater	 Silence mode	 Timer
 Heating at low outdoor temp. down to -25°C ⁽¹⁾	 Cooling at low outdoor temp. down to -30°C ⁽¹⁾	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode	 BMS Modbus ⁽²⁾	 BMS Bacnet ⁽²⁾	

1. Function not available in the Multi Split system. 2. Function available as an option. 3. Function available from the mobile application.

Technical specification

Model				Mirai 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (999-4158)
Rated input		Nom. (Min. - Max.)	W	483 (87-1955)
Operating current		Nom. (Min. - Max.)	A	2,1 (0,4-8,5)
Capacity	Heating	Nom. (Min. - Max.)	W	4103 (753-7000)
Rated input		Nom. (Min. - Max.)	W	834 (104-1955)
Operating current		Nom. (Min. - Max.)	A	3,6 (0,5-8,5)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	9,3
Energy efficiency class, cooling				A+++
Annual electric energy consumption, cooling			kWh/a	98
Design load in heating mode (Tbiv -7°C)			kW	2,2
SCOP			W/W	5,3
Energy efficiency class, heating				A+++
Annual electric energy consumption, heating			kWh/a	620
Dehumidification			l/h	1,0
Maximum energy consumption			W	2950
Maximum operating current			A	12,8
Indoor unit				M26Xi R15
EAN product code				5905567605918
Fan speed	H / M / L / S		rpm	1250 / 1120 / 1050 / 690 / 630 / 580
Air flow	H / M / L / S		m³/h	590 / 530 / 450 / 360 / 300 / 230
Sound pressure level	H / M / L / S		dB(A)	43 / 38 / 34 / 28 / 24 / 21
Sound power level			dB(A)	59
Rated input			W	50
Operating current			A	0,2
Net dimensions	W × D × H		mm	895 × 248 × 298
Gross dimensions	W × D × H		mm	985 × 370 × 345
Net weight / Gross weight			kg	13 / 17,1
Condensate drain			mm	16
Outdoor unit				M26Xo R15
EAN product code				5905567606793
Fan speed	H / M / L		rpm	850 / 750 / 450
Maximum air flow			m³/h	2350
Sound pressure level			dB(A)	56
Sound power level			dB(A)	60
Net dimensions	W × D × H		mm	805 × 330 × 554
Gross dimensions	W × D × H		mm	915 × 370 × 615
Bracket spacing	W × D		(mm)	511 × 317
Net weight / Gross weight			kg	28,4 / 31
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,90
		TCO ₂ eq		0,61
Charged (> 5m)	g/mb		12	
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	16-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-25-50 / -30-30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				•
1:X MULTI N-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;