



# Wall-mounted air conditioner

Ukura U26X <sup>[R14]</sup>

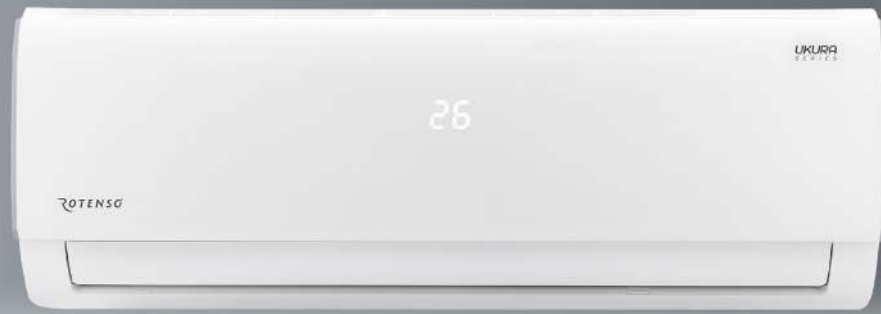

## Unit features

 Digital DC Inverter SKY <sup>®</sup>	 Automatic purification iAIR <sup>(1)</sup>	 Super Ionizer iAIR	 Cold Nano iAIR filter	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode <sup>(1)</sup>	 Automatic 4D louvres
 Turbo eMOTO mode <sup>(1)</sup>	 Air supply eMOTO control system	 Wide-angle eMOTO air supply	 SMART wi-fi	 Wired controller SMART port <sup>(2)</sup>	 SMART panel display ON/OFF	 SMART Follow mode	 Wireless remote control
 Wired controller <sup>(2)</sup>	 SMART heating to 8°C <sup>(1)(2)</sup>	 Louvre setting memory	 1W standby mode <sup>(1)</sup>	 Auto restart memory	 Anti-corrosive gold fins	 Silence mode	 Timer
 Heating at low outdoor temp. down to -20°C	 Cooling at low outdoor temp. down to -15°C	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode			

1

# Technical specification

Model				Ukura 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (820-3400)
Rated input		Nom. (Min. - Max.)	W	732 (100-1240)
Operating current		Nom. (Min. - Max.)	A	3,2 (0,4-5,4)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (820-3370)
Rated input		Nom. (Min. - Max.)	W	733 (120-1200)
Operating current		Nom. (Min. - Max.)	A	3,2 (0,5-5,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,8
SEER			W/W	6,3
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	155
Design load in heating mode (Tbiv -7°C)			kW	2,6
SCOP			W/W	4,0
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	910
Dehumidification			l/h	1
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U26Xi R14
EAN product code				5905567601385
Fan speed	H / M / L / S		rpm	1030 / 900 / 750 / 590
Air flow	H / M / L / S		m³/h	510 / 460 / 350 / 280
Sound pressure level	H / M / L / S		dB(A)	39 / 30 / 26 / 21
Sound power level			dB(A)	54
Rated input			W	20
Operating current			A	0,1
Net dimensions	W × D × H		mm	805 × 194 × 285
Gross dimensions	W × D × H		mm	870 × 270 × 365
Net weight / Gross weight			kg	7,6 / 9,8
Outdoor unit				U26Xo R14
EAN product code				5905567601422
Fan speed	H / M / L		rpm	760 / 620 / 450
Maximum air flow			m³/h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	62
Net dimensions	W × D × H		mm	720 × 270 × 495
Gross dimensions	W × D × H		mm	835 × 300 × 540
Bracket spacing	W × D		(mm)	452 × 255
Net weight / Gross weight			kg	23,2 / 25,0
Refrigerant	Type			R32
	GWP			675
	≤ 5m		kg	0,55
			TCO <sub>2</sub> eq	0,37
Charged (> 5m)		g/mb	12	
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1φ
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	-
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI				•

T - Turbo; H - High; M - Medium; L - Low; S - Silent;