


Wall-mounted air conditioner

Roni R26X ^[R17]

N-LINE

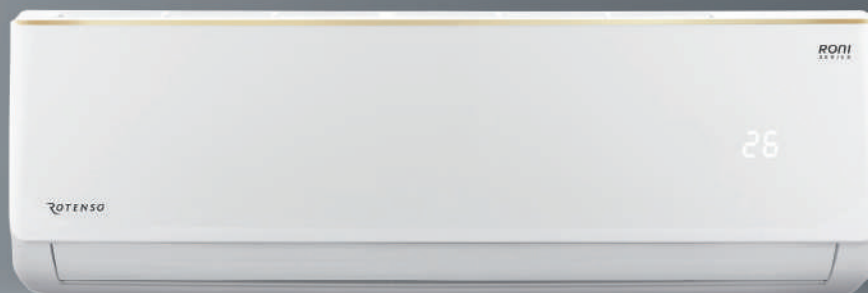

1:1
SINGLE

1:X
MULTI

Features device



Digital DC Inverter SKY®



Automatic cleaning iAIR



Automatic purification iClean ⁽¹⁾



3-in-1 filter (Ca + Si, Ion + vit. C) iAIR ^(*)



3-in-1 filter (Photo. + Ac.c + Nano) iAIR ^(**)



Electrostatic HD iAIR filter



Super Silent eMOTO mode



Automatic 4D louvres



Turbo eMOTO mode



Air supply control system eMOTO



ECO eMOTO mode



Wide angle eMOTO air supply



SMART Wi-Fi



Smart panel display ON/OFF



SMART Follow mode ⁽¹⁾



Wireless remote controller



SMART heating to 8°C ⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -20°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode

1

1. Function not available in the Multi Split system.

* 3-in-1 iAIR filter: Catechin + Silver Ion + Vitamin C

** 3-in-1 iAIR filter: Photocatalytic + Activated carbon + Cold Nano

Technical specification

Model				Roni 2,6 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	2600 (940-3300)	
Rated input		Nom. (Min. - Max.)	W	851 (240-1380)	
Operating current		Nom. (Min. - Max.)	A	3,7 (1-6,0)	
Capacity	Heating	Nom. (Min. - Max.)	W	2680 (940-3200)	
Rated input		Nom. (Min. - Max.)	W	786 (240-1552)	
Operating current		Nom. (Min. - Max.)	A	3,4 (1-6,7)	
Reversible heat pump type				air-to-air	
Design load in cooling mode			kW	2,6	
SEER			W/W	6,1	
Energy efficiency class, cooling				A++	
Annual electric energy consumption, cooling			kWh/a	150	
Design load in heating mode (Tbiv -7°C)			kW	2,0	
SCOP			W/W	4,0	
Energy efficiency class, heating				A+	
Annual electric energy consumption, heating			kWh/a	700	
Dehumidification			l/h	1,0	
Maximum energy consumption			W	1552	
Maximum operating current			A	6,7	
Indoor unit				R26Xi R17	
EAN product code				5905567614408	
Fan speed		T / H / M / L / S	rpm	1400 / 1300 / 1100 / 1050 / 900	
Air flow		T / H / M / L / S	m³/h	420 / 390 / 330 / 320 / 270	
Sound pressure level		T / H / M / L / S	dB(A)	42 / 37 / 33 / 25 / 22	
Sound power level			dB(A)	52	
Rated input			W	30	
Operating current			A	0,1	
Net dimensions		W × D × H	mm	698 × 205 × 255	
Gross dimensions		W × D × H	mm	765 × 260 × 335	
Net weight / Gross weight			kg	6,5 / 8,5	
Condensate drain			mm	16	
Outdoor unit				R26Xo R17	
EAN product code				5905567614422	
Fan speed		T / H / M / L / S	rpm	930 / 930 / 830 / 730 / 630	
Maximum air flow			m³/h	1700	
Sound pressure level			dB(A)	52	
Sound power level			dB(A)	62	
Net dimensions		W × D × H	mm	740 × 253 × 459	
Gross dimensions		W × D × H	mm	765 × 310 × 481	
Bracket spacing		W × D	(mm)	362 × 256	
Net weight / Gross weight			kg	19 / 21	
Refrigerant	Type			R32	
	GWP			675	
	≤ 5m	kg		0,49	
		TCO ₂ eq		0,33	
Charged (> 5m)		g/mb		12	
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	
Maximum installation length			m	25	
Maximum height difference			m	10	
Compressor type				Rotary DC	
Type of outdoor unit power supply			V-Hz, Ø	220-240~50, 1f	
Electrical protection			A	B10	
Power cables: outdoor unit			pcs × mm²	3 × 1,5	
Control and power cables: indoor unit - outdoor unit			pcs × mm²	4 × 1	
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1	
Indoor operating range (Cooling / Heating)			°C	16~32 / 0~30	
Outdoor operating range (Cooling / Heating)			°C	-15~53 / -20~30	
Compatible systems					
1:1 SINGLE				●	
1:2 DUAL					
1:X MULTI S-Line					
1:X MULTI N-Line				●	
1:X MULTI HP-Line					

T - Turbo; H - High; M - Middle; L - Low; S - Silent