


# Wall-mounted air conditioner

Versu Cloth Stone VCS50X <sup>[R15]</sup>

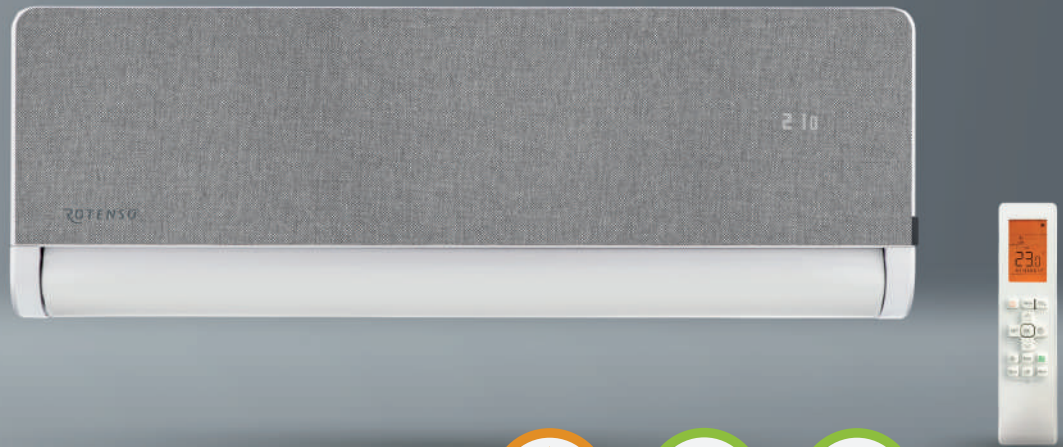

- SCOP 4,1
- Wi-Fi
- 22°C
- Super Ionizer
- Heating coil
- Cooling coil
- 5 year WARRANTY
- PZH CERTIFICATE

- DEDICATED TO HEATING
- 1:1 SINGLE
- 1:X MULTI

## Unit features

SKY inverter Digital DC Inverter SKY <sup>®</sup>	Textile changeable front panel	Automatic purification iClean <sup>(1)</sup>	Super Ionizer iAIR	3-in-1 (Si,Ion + Photocat. + Nano) iAIR filter <sup>(1)</sup>	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode <sup>(1)</sup>
Automatic 4D louvers	Rotating louvre 180°	Turbo eMOTO mode <sup>(1)</sup>	Upwards cascade air supply	Downwards cascade air supply	Air supply eMOTO control system	Eco eMOTO mode <sup>(1)</sup>	Wide-angle eMOTO air supply
Humidity sensor <sup>(1)(2)</sup>	SMART wi-fi	Wired controller SMART port <sup>(2)</sup>	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control	Wired controller <sup>(2)</sup>	SMART heating to 8°C <sup>(1)</sup>
Louvre setting memory	1W standby mode <sup>(1)</sup>	Auto restart memory	Anti-corrosive gold fins	Drip tray heater	Compressor crankcase heater	Silence mode	Timer
Cooling at low outdoor temp. down to -15°C	Heating at low outdoor temp. down to -22°C <sup>(1)</sup>	Double-sided condensate drainage	Self-diagnostics	Sleep mode	BMS Modbus <sup>(2)</sup>	BMS Bacnet <sup>(2)</sup>	

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

\* Silver Ion + Photocatalytic + Cold Nano

# Technical specification

Model				Versu Cloth Stone 5,3 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	5,3
SEER			W/W	6,3
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	294
Design load in heating mode (Tbiv -7°C)			kW	4,1
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	1430
Dehumidification			l/h	1,8
Maximum energy consumption			W	2500
Maximum operating current			A	10,9
Indoor unit				VCS50Xi R15
EAN product code				5905567601095
Fan speed	T / H / M / L / ML / S	rpm		1150 / 970 / 880 / 800 / 760 / 670
Air flow	T / H / M / L / ML / S	m³/h		750 / 590 / 490 / 410 / 330 / 280
Sound pressure level	T / H / M / L / ML / S	dB(A)		41 / 36 / 30 / 28 / 24 / 19
Sound power level		dB(A)		54
Rated input		W		34
Operating current		A		0,1
Net dimensions	W × D × H	mm		920 × 211 × 321
Gross dimensions	W × D × H	mm		1005 × 295 × 385
Net weight / Gross weight		kg		11,5 / 14,4
Condensate drain		mm		16
Outdoor unit				VO50Xo R15
EAN product code				5905567606687
Fan speed	H / M / L	rpm		760 / 650 / 490
Maximum air flow		m³/h		2100
Sound pressure level		dB(A)		54
Sound power level		dB(A)		63
Net dimensions	W × D × H	mm		805 × 330 × 554
Gross dimensions	W × D × H	mm		915 × 370 × 615
Bracket spacing	W × D	(mm)		511 × 317
Net weight / Gross weight		kg		33,5 / 36,1
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		1,1
		TCO <sub>2</sub> eq		0,74
Charged > 5m	g/mb		12	
Pipe connections	Liquid/Gas	mm (inches)		Φ6,35 / Φ12,7 (1/4" / 1/2")
Maximum installation length		m		30
Maximum height difference		m		20
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C16
Power cables: outdoor unit			pcs × mm²	3 × 2,5
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 2,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5
Indoor operating range (cooling / heating)			°C	16~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -22~30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				•
1:X MULTI N-Line				