














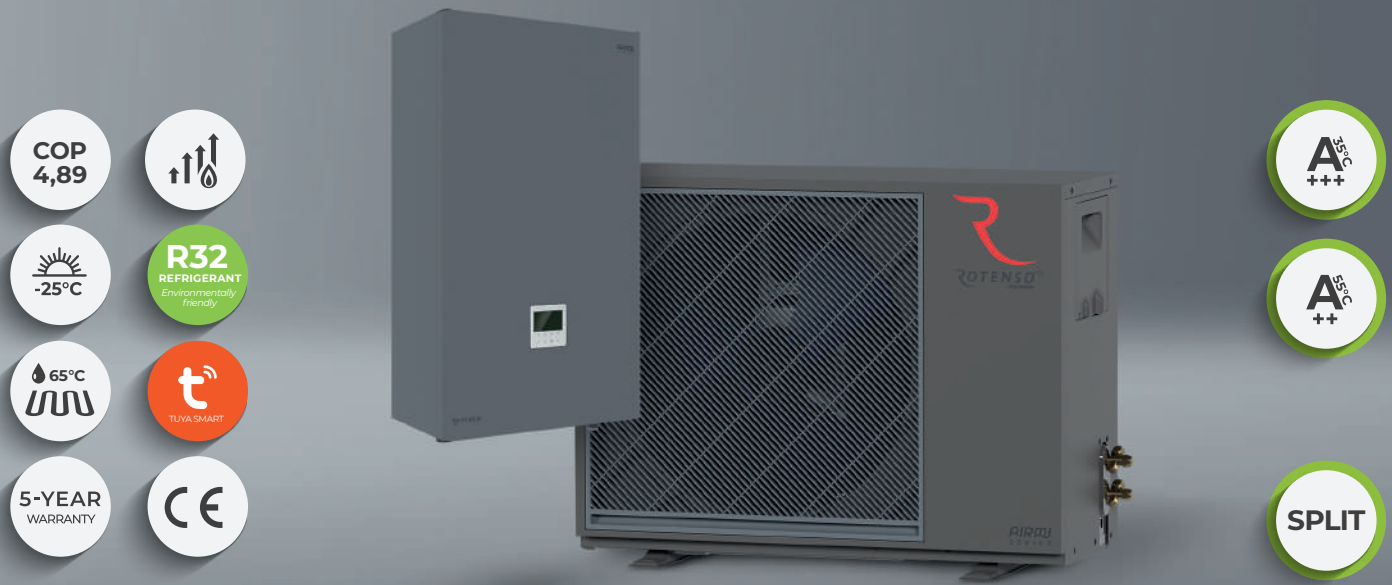


















Airmi Split heat pump

AISB60X1o^[R14] / AIS60X1i^[R14]



Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,89	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
							
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
							
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
							
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model				AIS60X11 R14		
EAN Code				5905567602832		
Operation modes				Heating and cooling		
Leaving water temperature	Space cooling	°C		7-25		
	Space heating	°C		25-65		
	DHW (tank)	°C		25-60		
Power supply		V-Hz, Ø	220-240-50, 1f			
Rated input		W	3090			
Operating current		A	13,9			
Sound power level		dB	42			
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f			
	Number of heating stages	pcs	1			
	Power	kW	3			
	Maximum operating current	A	13,6			
Net dimensions		(W x D x H)	mm	465 x 273 x 909		
Gross dimensions		(W x D x H)	mm	525 x 345 x 960		
Net weight / Gross weight			kg	34 / 38		
Water circuit	Water connections		mm(inch)	Ø33 (1,30)		
	Pressure relief valve		MPa	0,3		
	Condensate drain		mm	Ø12,7		
	Expansion tank	Total volume		l	5	
		Actual volume		l	2	
		Maximum pressure		MPa	0,5	
		Initial pressure		MPa	0,15	
	Heat exchanger	Type		PHE / plate heat exchanger		
		Minimum flow		l/min	10	
	Water pump head		m	9		
Water pump type			DC inverter			
Refrigerant circuit		Liquid / Gas	mm	Ø6,35 / Ø15,88		
Minimal wire pcs and dimension of cords*			pcs x mm ²	3 x 2,5		
Control cables: indoor unit to outdoor unit			pcs x mm ²	2 x 0,75 (shielded cable)		

Specification outdoor unit

Model				AISB60X10 R14		
EAN Code				5905567602627		
Power supply		V-Hz, Ø	220-240-50, 1f			
Heating (A7/W35)	Capacity	kW		6,00		
	Rated input	kW		1,23		
	COP			4,89		
Heating (A7/W45)	Capacity	kW		6,10		
	Rated input	kW		1,70		
	COP			3,58		
Heating (A7/W55)	Capacity	kW		6,20		
	Rated input	kW		2,18		
	COP			2,84		
Cooling (A35/W18)	Capacity	kW		6,20		
	Rated input	kW		1,29		
	EER			4,81		
Cooling (A35/W7)	Capacity	kW		6,00		
	Rated input	kW		2,04		
	EER			2,94		
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾		4,90			
	Rated heat output		kW	5,9		
	Seasonal energy efficiency ratio (η _s)		%	193		
	Annual energy consumption		kWh	2488		
	Seasonal space heating energy efficiency class ⁽¹⁾		A+++			
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾		3,36			
	Rated heat output		kW	5,4		
	Seasonal energy efficiency ratio (η _s)		%	131		
	Annual energy consumption		kWh	3443		
	Seasonal space heating energy efficiency class ⁽¹⁾		A++			
SEER	LWT at 7°C		5,27			
	LWT at 18°C		8,34			
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B16			
Compressor		Type	Twin rotary inverter compressor DC			
Fan		Type	Brushless DC motor / BLDC			
Refrigerant		Quantity	1			
		Type	R32			
		GWP	675			
Pipe connections		Quantity	kg	1,40		
			TCO _{eq}	0,945		
Liquid / Gas		mm	Ø6,35 / Ø15,88			
		Minimum installation length	m	3		
		Maximum installation length	m	15		
		Additional amount of refrigerant for over 7,5 linear meters	g/m	20		
Maximum height difference		Outdoor unit above the indoor unit	m	8		
		Outdoor unit below the indoor unit	m	8		
Minimal wire pcs and dimension of cords*			pcs x mm ²	3 x 2,5		
Control cables: indoor unit to outdoor unit			pcs x mm ²	2 x 0,75 (shielded)		
Bracket spacing		(W1 x D)	mm	624 x 425		
Sound pressure level			dB(A)	45		
Sound power level			dB(A)	58		
Net dimensions		(W x D x H)	mm	971 x 425 x 703		
Gross dimensions		(W x D x H)	mm	1025 x 425 x 865		
Net weight / Gross weight			kg	56 / 67		
Operating outdoor temperature		Cooling/ Heating	°C	-5-43 / -25-35		
		DHW	°C	-25-43		

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature


The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I_{Δn}: 30mA









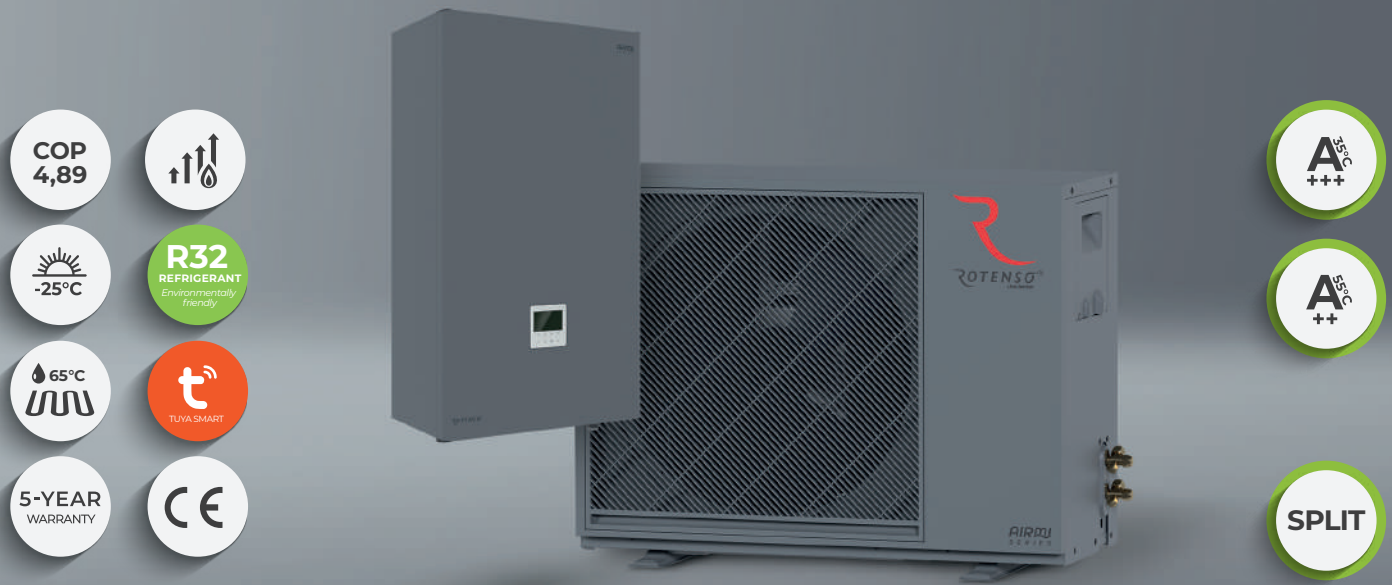






















*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

Airmi Split heat pump

AISG60X1o^[R14] / AIS60X1i^[R14]



Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,89	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
							
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
							
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
							
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model				AIS60X1i R14		
EAN Code				5905567602832		
Operation modes				Heating and cooling		
Leaving water temperature	Space cooling	°C		7-25		
	Space heating	°C		25-65		
	DHW (tank)	°C		25-60		
Power supply		V-Hz, Ø	220-240-50, 1f			
Rated input		W	3090			
Operating current		A	13,9			
Sound power level		dB	42			
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f			
	Number of heating stages	pcs	1			
	Power	kW	3			
	Maximum operating current	A	13,6			
Net dimensions		(W x D x H)	mm	465 x 273 x 909		
Gross dimensions		(W x D x H)	mm	525 x 345 x 960		
Net weight / Gross weight			kg	34 / 38		
Water circuit	Water connections		mm(inch)	Ø33 (1,30)		
	Pressure relief valve		MPa	0,3		
	Condensate drain		mm	Ø12,7		
	Expansion tank	Total volume		l	5	
		Actual volume		l	2	
		Maximum pressure		MPa	0,5	
		Initial pressure		MPa	0,15	
	Heat exchanger	Type		PHE / plate heat exchanger		
		Minimum flow		l/min	10	
	Water pump head		m	9		
Water pump type			DC inverter			
Refrigerant circuit		Liquid / Gas	mm	Ø6,35 / Ø15,88		
Minimal wire pcs and dimension of cords*			pcs x mm ²	3 x 2,5		
Control cables: indoor unit to outdoor unit			pcs x mm ²	2 x 0,75 (shielded cable)		

Specification outdoor unit

Model				AISG60X1o R14	
EAN Code				5905567602627	
Power supply		V-Hz, Ø	220-240-50, 1f		
Heating (A7/W35)	Capacity	kW		6,00	
	Rated input	kW		1,23	
	COP			4,89	
Heating (A7/W45)	Capacity	kW		6,10	
	Rated input	kW		1,70	
	COP			3,58	
Heating (A7/W55)	Capacity	kW		6,20	
	Rated input	kW		2,18	
	COP			2,84	
Cooling (A35/W18)	Capacity	kW		6,20	
	Rated input	kW		1,29	
	EER			4,81	
Cooling (A35/W7)	Capacity	kW		6,00	
	Rated input	kW		2,04	
	EER			2,94	
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾		4,90		
	Rated heat output		kW	5,9	
	Seasonal energy efficiency ratio (η _S)		%	193	
	Annual energy consumption		kWh	2488	
	Seasonal space heating energy efficiency class ⁽¹⁾		A+++		
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾		3,36		
	Rated heat output		kW	5,4	
	Seasonal energy efficiency ratio (η _S)		%	131	
	Annual energy consumption		kWh	3443	
	Seasonal space heating energy efficiency class ⁽¹⁾		A++		
SEER	LWT at 7°C		5,27		
	LWT at 18°C		8,34		
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B16		
Compressor		Type	Twin rotary inverter compressor DC		
Fan		Type	Brushless DC motor / BLDC		
Refrigerant		Quantity	1		
		Type	R32		
		GWP	675		
Pipe connections		Liquid / Gas	mm	Ø6,35 / Ø15,88	
		Minimum installation length	m	3	
Maximum height difference		Maximum installation length	m	15	
		Additional amount of refrigerant for over 7,5 linear meters	g/m	20	
		Outdoor unit above the indoor unit	m	8	
Minimal wire pcs and dimension of cords*			pcs x mm ²	3 x 2,5	
			pcs x mm ²	2 x 0,75 (shielded)	
Bracket spacing		(W1 x D)	mm	624 x 425	
Sound pressure level			dB(A)	45	
Sound power level			dB(A)	58	
Net dimensions		(W x D x H)	mm	971 x 425 x 703	
Gross dimensions		(W x D x H)	mm	1025 x 425 x 865	
Net weight / Gross weight			kg	56 / 67	
Operating outdoor temperature	Cooling/ Heating	°C		-5-43 / -25-35	
	DHW	°C		-25-43	

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I_{Δn}: 30mA
































*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.

Airmi Split heat pump

AISW60X1o^[R14] / AIS60X1i^[R14]



Device features

							
Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,89	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
							
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Indoor unit drip tray	Easy installation and maintenance	Compact indoor split unit housing	Maximum installation length up to 15m
							
Silent mode	Integrated Wi-Fi module	Daily operation schedule	Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor
							
Weather operating modes (climate curve)	2 heating control zones	Dedicated application	Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol	

Specification indoor unit

Model			AIS60X11 R14		
EAN Code			5905567602832		
Operation modes			Heating and cooling		
Leaving water temperature	Space cooling	°C	7-25		
	Space heating	°C	25-65		
	DHW (tank)	°C	25-60		
Power supply		V-Hz, Ø	220-240-50, 1f		
Rated input		W	3090		
Operating current		A	13,9		
Sound power level		dB	42		
Electric heater	Power supply	V-Hz, Ø	220-240-50, 1f		
	Number of heating stages	pcs	1		
	Power	kW	3		
	Maximum operating current	A	13,6		
Net dimensions		(W x D x H)	mm		
Gross dimensions		(W x D x H)	mm		
Net weight / Gross weight			kg		
Water circuit	Water connections		mm(inch)	Ø33 (1,30)	
	Pressure relief valve		MPa	0,3	
	Condensate drain		mm	Ø12,7	
	Expansion tank	Total volume		l	5
		Actual volume		l	2
		Maximum pressure		MPa	0,5
		Initial pressure		MPa	0,15
	Heat exchanger	Type		PHE / plate heat exchanger	
		Minimum flow		l/min	10
	Water pump head		m	9	
Water pump type			DC inverter		
Refrigerant circuit		Liquid / Gas	mm	Ø6,35 / Ø15,88	
Minimal wire pcs and dimension of cords*		pcs × mm ²	3 × 2,5		
Control cables: indoor unit to outdoor unit		pcs × mm ²	2 × 0,75 (shielded cable)		

Specification outdoor unit

Model			AIS60X10 R14	
EAN Code			5905567602627	
Power supply		V-Hz, Ø	220-240-50, 1f	
Heating (A7/W35)	Capacity	kW	6,00	
	Rated input	kW	1,23	
	COP		4,89	
Heating (A7/W45)	Capacity	kW	6,10	
	Rated input	kW	1,70	
	COP		3,58	
Heating (A7/W55)	Capacity	kW	6,20	
	Rated input	kW	2,18	
	COP		2,84	
Cooling (A35/W18)	Capacity	kW	6,20	
	Rated input	kW	1,29	
	EER		4,81	
Cooling (A35/W7)	Capacity	kW	6,00	
	Rated input	kW	2,04	
	EER		2,94	
Seasonal energy efficiency LWT at 35°C	SCOP ⁽¹⁾		4,90	
	Rated heat output		kW	5,9
	Seasonal energy efficiency ratio (η _s)		%	193
	Annual energy consumption		kWh	2488
	Seasonal space heating energy efficiency class ⁽¹⁾			A+++
Seasonal energy efficiency LWT at 55°C	SCOP ⁽¹⁾		3,36	
	Rated heat output		kW	5,4
	Seasonal energy efficiency ratio (η _s)		%	131
	Annual energy consumption		kWh	3443
	Seasonal space heating energy efficiency class ⁽¹⁾			A++
SEER	LWT at 7°C		5,27	
	LWT at 18°C		8,34	
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B16	
Compressor		Type	Twin rotary inverter compressor DC	
Fan		Type	Brushless DC motor / BLDC	
Refrigerant		Quantity	1	
		Type	R32	
		GWP	675	
Pipe connections		Quantity	kg	1,40
		TCO _{eq}		0,945
		Liquid / Gas	mm	Ø6,35 / Ø15,88
Maximum height difference		Minimum installation length	m	3
		Maximum installation length	m	15
		Additional amount of refrigerant for over 7,5 linear meters	g/m	20
Outdoor unit above the indoor unit		m		8
		m		8
Minimal wire pcs and dimension of cords*		pcs × mm ²	3 × 2,5	
Control cables: indoor unit to outdoor unit		pcs × mm ²	2 × 0,75 (shielded)	
Bracket spacing		(W1 × D)	mm	
Sound pressure level		dB(A)	45	
Sound power level		dB(A)	58	
Net dimensions		(W x D x H)	mm	
Gross dimensions		(W x D x H)	mm	
Net weight / Gross weight			kg	
Operating outdoor temperature	Cooling/ Heating	°C	-5-43 / -25-35	
	DHW	°C	-25-43	

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than I_{Δn}: 30mA

*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.