



# Airmi Monoblock heat pump

AIMB120X3 <sup>[R14]</sup>

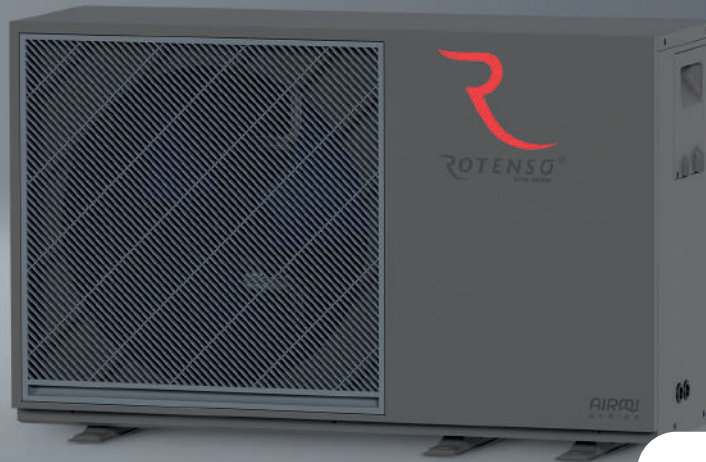

## Device features

Environmentally friendly refrigerant R32	Efficient heating	Energy efficiency class at 35°C A+++	Energy efficiency class at 55°C A++	Maximum COP 4,70	Operating range down to -25°C	Supply water temperature of 65°C	Smart Grid functionality
Twin rotary compressor	Integrated electric heater	Outdoor unit drip tray heater	Compressor crankcase heater	Easy installation and maintenance	Silent mode	WiFi module in wired controller	Daily operation schedule
Configurable weekly schedules	Vacation mode	Menu in English	Multilanguage menu	Integrated temperature sensor	Weather operating modes (climate curve)	2 heating control zones	Dedicated application
Disinfection	Maximum leaving water temperature of 60°C (in DHW mode)	Prepared to create a cascade system	Modbus Protocol				

# Specification outdoor unit

Model			AIMB120X3 R14	
EAN Code			5905567602443	
Power supply		V-Hz, Ø	380-420-50, 3f	
Heating (A7/W35)	Capacity	kW	12,10	
	Rated input	kW	2,57	
	COP		4,70	
Heating (A7/W45)	Capacity	kW	12,10	
	Rated input	kW	3,36	
	COP		3,60	
Heating (A7/W55)	Capacity	kW	12,30	
	Rated input	kW	4,44	
	COP		2,77	
Cooling (A35/W18)	Capacity	kW	11,90	
	Rated input	kW	2,72	
	EER		4,36	
Cooling (A35/W7)	Capacity	kW	11,60	
	Rated input	kW	4,14	
	EER		2,80	
Seasonal energy efficiency LWT at 35°C	SCOP <sup>(1)</sup>		4,77	
	Rated heat output	kW	11,3	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	188	
	Annual energy consumption	kWh	4872	
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A+++	
Seasonal energy efficiency LWT at 55°C	SCOP <sup>(1)</sup>		3,65	
	Rated heat output	kW	11,00	
	Seasonal energy efficiency ratio (η <sub>S</sub> )	%	141	
	Annual energy consumption	kWh	6319	
	Seasonal space heating energy efficiency class <sup>(1)</sup>		A++	
SEER	LWT at 7°C		5,45	
	LWT at 18°C		8,29	
Minimum rated current of the overcurrent circuit breaker with breaker type		A	B25	
Compressor	Type	Twin rotary inverter compressor DC		
Fan	Type	Brushless DC motor / BLDC		
	Quantity	1		
Refrigerant	Type	R32		
	GWP	675		
	Quantity	kg	1,75	
		TCO <sub>eq</sub>	1,181	
Minimal wire pcs and dimension of cords*		pcs × mm <sup>2</sup>	5 × 4	
Bracket spacing	(W1 × W2 × D)	mm	640×239×448	
Sound pressure level		dB(A)	46	
Sound power level		dB(A)	64	
Net dimensions	(W × D × H)	mm	1135 × 488 × 803	
Gross dimensions	(W × D × H)	mm	1260 × 488 × 982	
Net weight / Gross weight		kg	115 / 132	
Operating outdoor temperature	Cooling / Heating	°C	-5-43 / -25-35	
	DHW	°C	-25-43	
Operation modes			Heating and cooling	
Leaving water temperature	Space cooling	°C	7-25	
	Space heating	°C	25-65	
	DHW (tank)	°C	25-60	
Electric heater	Power supply	V-Hz, Ø	380-420-50, 3f	
	Number of heating stages	pcs	3	
	Power	kW	9	
	Maximum operating current	A	13,6	
Water circuit	Water connections		mm (inch)	Φ33 (1,30)
	Pressure relief valve		MPa	0,3
	Condensate drain		mm	Φ12,7
	Expansion tank	Total volume	l	5
		Actual volume	l	2
		Maximum pressure	MPa	0,5
		Initial pressure	MPa	0,15
	Heat exchanger	Type	PHE / plate heat exchanger	
		Minimum flow	l/min	10
	Water pump head		m	9
Water pump type			DC inverter	
Total water volume		l	1,25	

(1) Seasonal energy efficiency class measured under average climate conditions.

Notes: DHW - Domestic hot water, LWT - Leaving water temperature

The sound pressure level is measured 1m in front of the unit and (1+H)/2m (where H is the height of the unit) above the floor in semi-anechoic room. During on-site operation sound pressure levels can be higher as a result of ambient noise. Sound pressure level and sound power level reflect the maximum value tested under three conditions specified respectively in notes A7W35, ΔT=5; A7W45, ΔT=5; A7W55 ΔT=8; relative humidity 85%. The figures specified above refer to the following standards: EN14511; EN14825; EN50564; EN12102; (EU) Np. 811/2013; (EU) No. 813/2013; Journal of Laws 2014 / C 207/02: 2014.

The residual current circuit breaker used to protect the electrical circuit of the appliance shall be selected in view of the electrical regulations in force, assuming that the rated residual current is not greater than 30mA

\*The above values apply to supply cables with a maximum length of 20mb. If this value is exceeded, an electrical designer should be consulted.